


MODEL : SB



Dimension

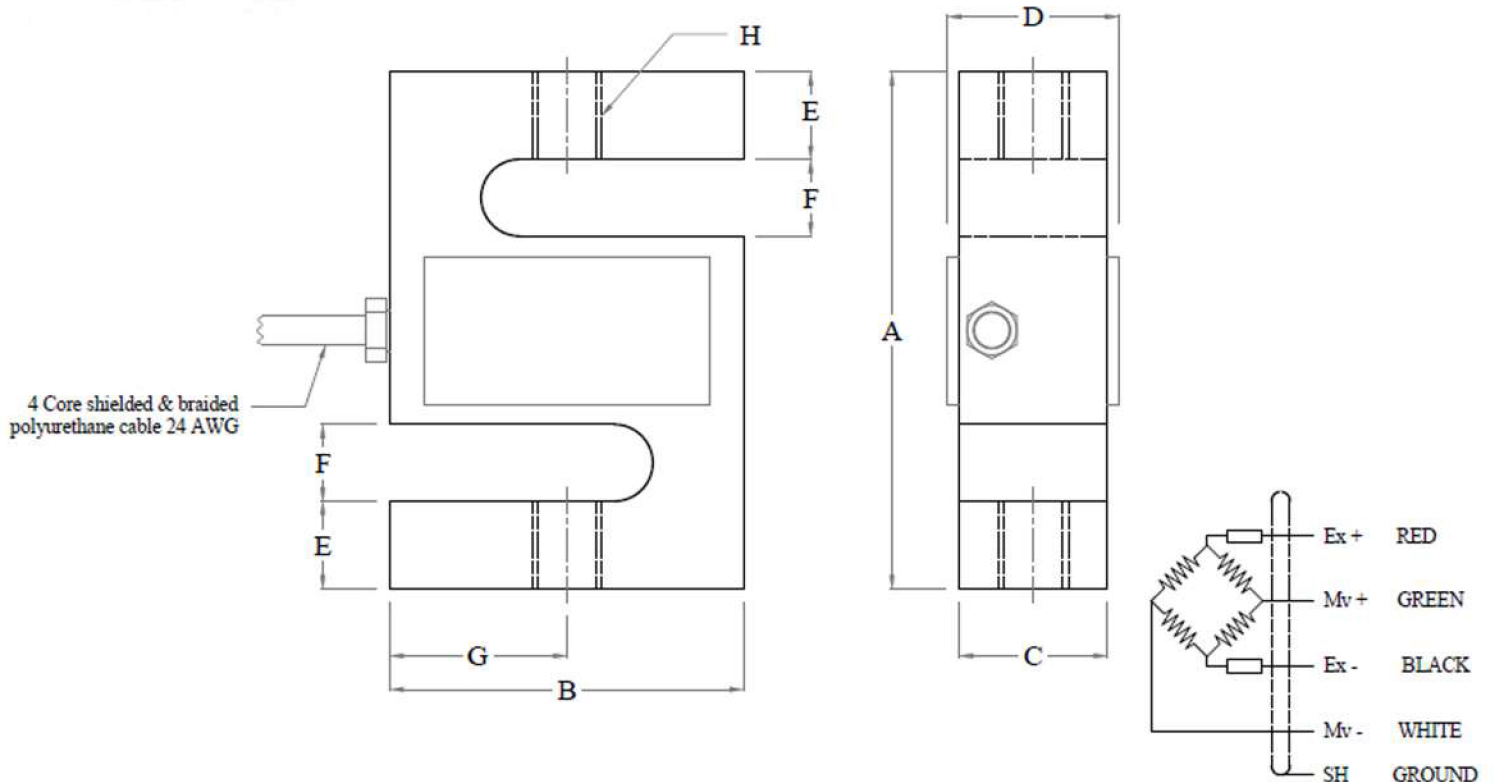

Cap. μ f	A	B	C	D	E	F	G	H
3.5 - 5	121	89	25.2	28.2	28	12	44.5	M20x1.5
7	138	100	31.5	34.5	31.6	12	50	M24x2.0
10 - 11.5	150	125	45	48	37.5	12	62.5	M30x2.0

All Dimensions are in mm.

MODEL : SB

Performance Data

Capacity Range (in Kg)	
Capacity Range (in tf)	3.5/ 5/ 7/ 10/ 11.5
Nominal Sensitivity (mv/V)	3±0.25%
Zero Signal Tolerance	0 ± 2%
Input Resistance	350±5Ω
Output Resistance	350±3Ω
Recommended Excitation Voltage	10 VDC
Maximum Excitation Voltage	15 VDC
Linearity Deviation (as % of Full Scale)	< ± 0.020
Repeatability (as % of Full Scale)	< ± 0.020
Hysteresis (as % of Full Scale)	< ± 0.020
Creep (as % of Full Scale) in 30 min	< ± 0.020
Effect of Temperature on Zero (% / °C)	± 0.002
Effect of Temperature on Span (% / °C of Load)	± 0.001
Compensated Temperature Range	-10 to + 40°C
Operating Temperature Range	-20 to +70°C
Combined Error (as % Full Scale)	< ± 0.020 max
Isolation Resistance (@ 50 VDC)	> 1000 M Ω
Max. Limit Force (as % of Full Scale)	150
Breaking Force (as % of Full Scale)	300
Lateral Load Limit (as % of Full Scale)	
Protection Class	IP 67
Material of Construction	High Nickel Alloy Steel

Features

- ★ Low Profile Design
- ★ Low Deflection & Creep
- ★ Excellent Overload Capability
- ★ Standardised output for
- ★ Multi-Transducer Application

Optional

- ★ Explosion proof Version Suitable for Group I, IIA, IIB, IIC & meet Temperature Class T4

Application

- ★ UTM, SPM, Bin/Hopper/Hanging Scale/Weighfeeder/ Overhead Truck scale/crane scale Concrete Batching Machinery / Tensile Testing machine/ Compressive Testing/paramedical/GYM Equipment/Dynamic Weighing/Automobile testing machine / Aerospace / Engine Thrust Measurement.

Sensotech

2/675, " THE PALMS", 1st Cross Street, Ranga Reddy Garden, Neelankarai, Chennai-600115

(+91) - 9176070667 / 9790922667 / 9952020667 / 9566022667

Mail : sales@sensotechindia@gmail.com / sensotechindia@gmail.com

Website : <https://sensomatic.co> / <https://sensomaticloadcell.net>